



PRODUCT SPECIFICATION – Hotel Telephone IP60N

Shandong Bittel Intelligent Technology Co., Ltd.

No. 1 Rizhao North Road, Rizhao,
Shandong, 276800, China

www.bittelgroup.com,



www.hotelphone.com info@bittelgroup.com

- Features:**
- IP60W FN is 1 Line Corded VOIP.
 - Supports SIP V2/SDP/RTP/RTCP/STUN/SNTP/ DNS/SNMPv2 protocols.
 - Supports IEEE802.1 Q standard, IEEE802.3af protocols.
 - Supports G.711/G.722(HD Voice)/G.723/G.729AB /G.726/iLBC.
 - Mute, hold, flash, redial and Speaker feature.
 - Message waiting light compatible with main PBX, MWL indicator and withdraw feature.
 - Owns Eight (8) service keys.
 - Supports DHCP and static IP address protocol for getting IP address.
 - Supports upgrade through HTTP/TFTP protocol.
 - Adopts dynamic speech detection; Comfortable noise generation; Speech buffering technologies.
 - Integrated PoE power supply and external POE adapter power supply.

CONTROLS AND FUNCTIONAL KEYS

Features Description of the functional keys

	Places the call on hold
	Microphone switch (handset)
	Flash button
	MWI – Message Waiting Indicator
	To lower or increase the speaker and handset volume
	Redial button / Page Handset
	For on hook dialling (speaker phone mode)
	Key for special services
	Key for special services

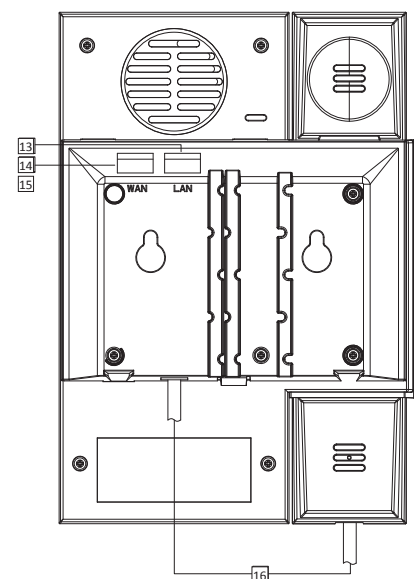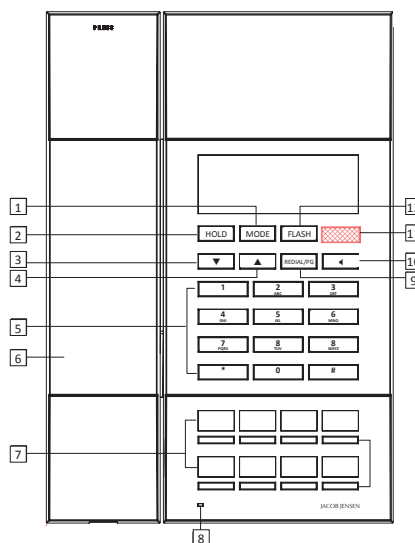

Colour scheme – front plates



Base unit – front

1. MUTE Keys
2. HOLD Key
3. ▼ Key
4. ▲ Key
5. Number Keys
6. Handset

Base unit – rear

7. Service Keys
8. Indicator Light
9. REDIAL Key
10. Speaker
11. MWL
12. FLASH

13. LAN Port
14. WAN Port
15. DC Jack
16. Handset Cord

Material: ABS, PMMA

Colours Anthracite with coloured plates: white, silver, black, gold, red or blue

Approved standards: EN 55022 and EN 55024